

FRESHPOINT® GRO-475

FOUR STAGE REVERSE OSMOSIS SYSTEMS



GRO-475M, (with filter life monitor) shown

APPLICATIONS

- ◆ Drinking water

FEATURES • BENEFITS

- ◆ Reduces more than 90% of contaminants found in water
- ◆ Effortless click-in cartridge change-outs
- ◆ Color-coded cartridges helps maintain proper filter sequence
- ◆ 3/8" push fittings for easy installation
- ◆ High efficiency membrane technology delivers up to 75 gallons per day

MODELS

- ◆ GRO-475B
- ◆ GRO-475M (with TDS monitor)

INSTALLATION TIPS

- ◆ Choose a mounting location suitable to support the full weight of the system when operating.
- ◆ Install vertically with the cartridge hanging down.
- ◆ System may be installed with cartridge flush to the baseboard if desired as the mechanical assist lever pushes cartridges straight out.


OPERATION TIPS

- ◆ Replace pre/post filters every year and RO membrane every 18 months.
- ◆ Place replacement cartridges in proper sequence utilizing color-coded shapes.
- ◆ System designed with integrated check valves so cold water line does not need to be shut-off to perform cartridge change-outs

INCLUDES

- ◆ Air gap side faucet
- ◆ Installation kit
- ◆ Installation and operation manual
- ◆ 4.4 gallon storage tank

FRESHPOINT GRO-475 FOUR STAGE REVERSE OSMOSIS SYSTEMS

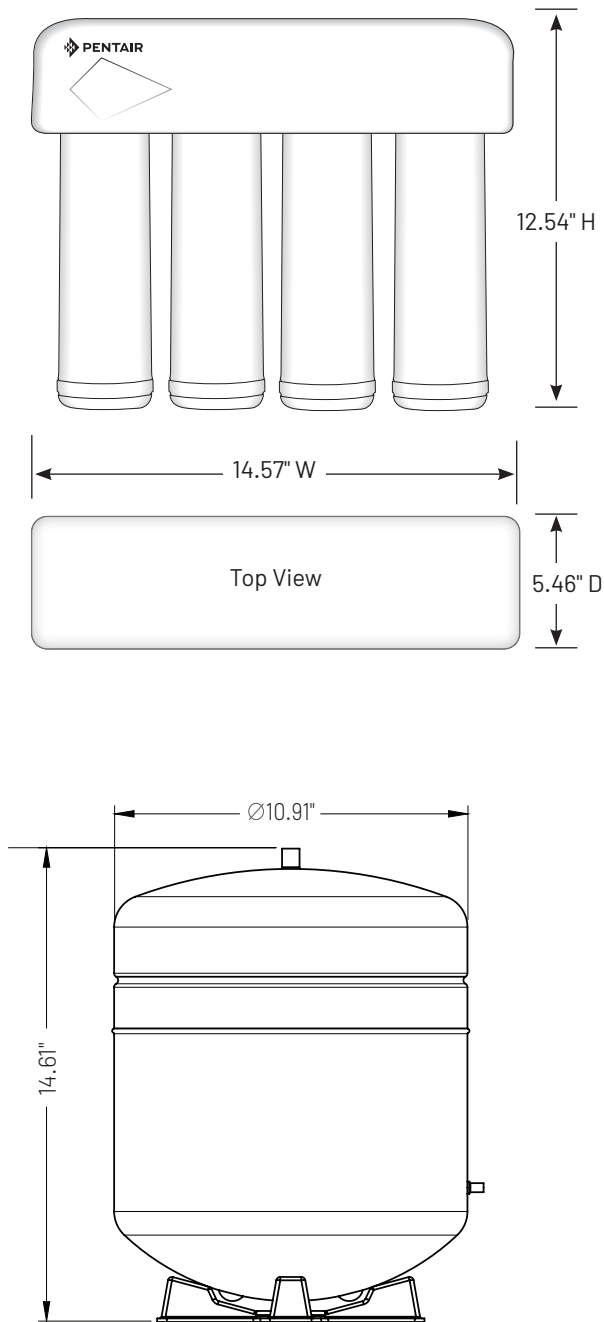

SPECIFICATIONS

- ◆ **Systems (Model/Part No.)**
GRO-475B/161111
GRO-475M/161151
- ◆ **Inlet Size**
3/8" QC
- ◆ **System Dimensions**
14.57" W x 5.46" D x 12.54" H
(370 mm x 139 mm x 319 mm)
- ◆ **System Weight**
8.90 lbs
- ◆ **Contaminant Reduction**
Chlorine Taste and Odor,
Nominal Particulate, Class I,
Atrazine, Lead, Lindane, Arsenic
(Pentavalent) <= 50 ppb,
Barium, Cadmium, Chromium
(Hexavalent), Chromium
(Trivalent), Copper, Fluoride,
Radium 226/228, Selenium,
Turbidity, TDS,
Cyst: NSF/ANSI Standard 53
certified to reduce cysts such
as *Cryptosporidium* and *Giardia*
by mechanical means.
- ◆ **TDS Rejection**
96.30%
- ◆ **Approximate Filter Life***
Pre/Post Filters: 1 year
RO Membrane: 18 months
- ◆ **System Production Rate**
21.08 gpd (79.79 Lpd)
(Side Faucet Required)
- ◆ **Recovery Rating**
41.05%
- ◆ **Certifications**
NSF/ANSI Standards 42/53/58
CSA Standard B483.1
- ◆ **Feed Pressure Range**
40 - 100 psi (2.75 - 6.89 bar)
- ◆ **Temperature Range**
40 - 100°F (4.4 - 37.8°C)
- ◆ **Replacement Cartridges**
(Model/Part No.)
F1GC-RC/655117-96
FDF1-RC/655123-96
F1B1-RC/655120-96
GRO75-RC/655122-96

* Filter life dependent on gallon usage and overall incoming water quality.

EPA Est. No. 082989-CHN-001



The Models GRO-475B and GRO-475M are Tested and Certified by NSF International against NSF/ANSI Standards 42, 53, 58 and CSA B483.1 for the reduction of substances specified in the service manual or at www.nsf.org.



13845 Bishops Dr. | Suite 200 | Brookfield, WI 53005 | United States
P: 262.238.4400 | Customer Service: 800.279.9404 | tech-support@pentair.com | pentair.com

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of the

© 2021 Pentair. All rights reserved.

4004805 Rev D JE21